

Introduction

- ▶ We have introduced systems as devices that process an input signal $x[n]$ to produce an output signal $y[n]$.
- ▶ **Example Systems:**
 - ▶ **Squarer:** $y[n] = (x[n])^2$
 - ▶ **Modulator:** $y[n] = x[n] \cdot \cos(2\pi f_d n)$, with $0 < f_d \leq \frac{1}{2}$.
 - ▶ **FIR Filter:**

$$y[n] = \sum_{k=0}^{M-1} h[k] \cdot x[n-k].$$

Recall that $h[k]$ is the **impulse response** of the filter and that the above operation is called **convolution** of $h[n]$ and $x[n]$.

- ▶ **Objective:** Define important characteristics of systems and determine which systems possess these characteristics.

Causal Systems

- ▶ **Definition:** A system is called **causal** when it uses only the present and past samples of the input signal to compute the present value of the output signal.
- ▶ Causality is usually easy to determine from the system equation:
 - ▶ The output $y[n]$ must depend only on input samples $x[n], x[n-1], x[n-2], \dots$
 - ▶ Input samples $x[n+1], x[n+2], \dots$ must not be used to find $y[n]$.
- ▶ **Examples:**
 - ▶ All three systems on the previous slide are causal.
 - ▶ The following system is non-causal:

$$y[n] = \frac{1}{3} \sum_{k=-1}^1 x[n-k] = \frac{1}{3} (x[n+1] + x[n] + x[n-1]).$$

Linear Systems

- ▶ The following test procedure defines linearity and shows how one can determine if a system is linear:

1. **Reference Signals:** For $i = 1, 2$, pass input signal $x_i[n]$ through the system to obtain output $y_i[n]$.
2. **Linear Combination:** Form a new signal $x[n]$ from the linear combination of $x_1[n]$ and $x_2[n]$:

$$x[n] = x_1[n] + x_2[n].$$


Then, Pass signal $x[n]$ through the system and obtain $y[n]$.

3. **Check:** The system is linear if

$$y[n] = y_1[n] + y_2[n]$$

- ▶ The above must hold for **all** inputs $x_1[n]$ and $x_2[n]$.
- ▶ For a linear system, the **superposition** principle holds.

Illustration

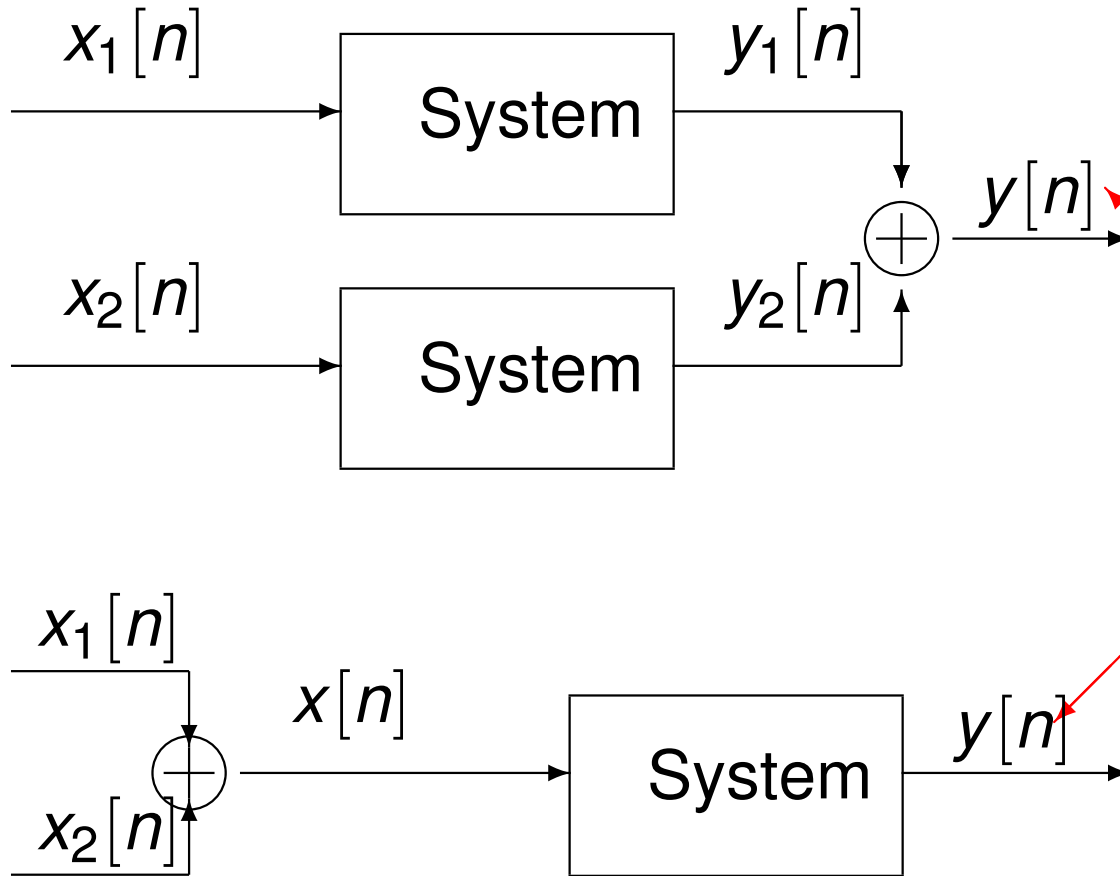

These two outputs must be identical

Example: Squarer

► **Squarer:** $y[n] = (x[n])^2$

1. **References:** $y_i[n] = (x_i[n])^2$ for $i = 1, 2$.

2. **Linear Combination:** $x[n] = x_1[n] + x_2[n]$ and

$$\begin{aligned} y[n] &= (x[n])^2 = (x_1[n] + x_2[n])^2 \\ &= (x_1[n])^2 + (x_2[n])^2 + 2x_1[n]x_2[n]. \end{aligned}$$

3. **Check:**

$$y[n] \neq y_1[n] + y_2[n] = (x_1[n])^2 + (x_2[n])^2.$$

► **Conclusion:** **not linear.**

Example: Modulator

- ▶ **Modulator:** $y[n] = x[n] \cdot \cos(2\pi f_d n)$
 1. **References:** $y_i[n] = x_i[n] \cdot \cos(2\pi f_d n)$ for $i = 1, 2$.
 2. **Linear Combination:** $x[n] = x_1[n] + x_2[n]$ and

$$\begin{aligned} y[n] &= x[n] \cdot \cos(2\pi f_d n) \\ &= (x_1[n] + x_2[n]) \cdot \cos(2\pi f_d n). \end{aligned}$$

3. **Check:**

$$y[n] = y_1[n] + y_2[n] = x_1[n] \cdot \cos(2\pi f_d n) + x_2[n] \cdot \cos(2\pi f_d n).$$

- ▶ **Conclusion:** **linear.**

Example: FIR Filter

► **FIR Filter:** $y[n] = \sum_{k=0}^{M-1} h[k] \cdot x[n - k]$

1. **References:** $y_i[n] = \sum_{k=0}^{M-1} h[k] \cdot x_i[n - k]$ for $i = 1, 2$.
2. **Linear Combination:** $x[n] = x_1[n] + x_2[n]$ and

$$y[n] = \sum_{k=0}^{M-1} h[k] \cdot x[n - k] = \sum_{k=0}^{M-1} h[k] \cdot (x_1[n - k] + x_2[n - k]).$$

3. **Check:**

$$y[n] = y_1[n] + y_2[n] = \sum_{k=0}^{M-1} h[k] \cdot x_1[n - k] + \sum_{k=0}^{M-1} h[k] \cdot x_2[n - k].$$

- **Conclusion:** **linear.**

Time-invariance


- ▶ The following test procedure defines time-invariance and shows how one can determine if a system is time-invariant:

1. **Reference:** Pass input signal $x[n]$ through the system to obtain output $y[n]$.
2. **Delayed Input:** Form the delayed signal $x_d[n] = x[n - n_0]$. Then, Pass signal $x_d[n]$ through the system and obtain $y_d[n]$.
3. **Check:** The system is time-invariant if


$$y[n - n_0] = y_d[n]$$

- ▶ The above must hold for **all** inputs $x[n]$ and all delays n_0 .
- ▶ **Interpretation:** A time-invariant system does not change, over time, the way it processes the input signal.

Illustration

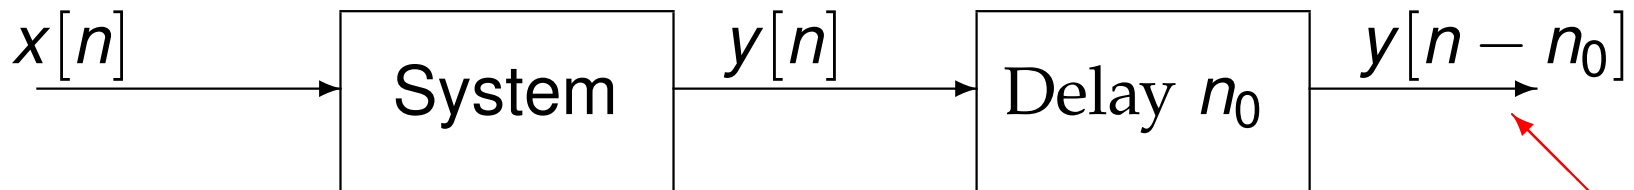

These two outputs must be identical

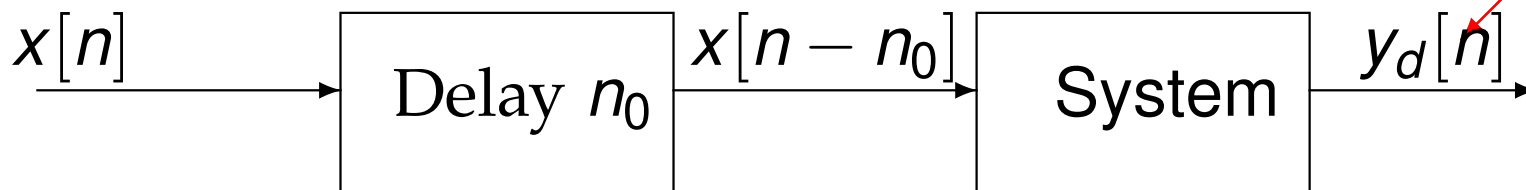

Example: Squarer

► **Squarer:** $y[n] = (x[n])^2$

1. **Reference:** $y[n] = (x[n])^2$.

2. **Delayed Input:** $x_d[n] = x[n - n_0]$ and

$$y_d[n] = (x_d[n])^2 = (x[n - n_0])^2.$$

3. **Check:**

$$y[n - n_0] = (x[n - n_0])^2 = y_d[n].$$

► **Conclusion:** **time-invariant.**

Example: Modulator

► **Modulator:** $y[n] = x[n] \cdot \cos(2\pi f_d n)$.

1. **Reference:** $y[n] = x[n] \cdot \cos(2\pi f_d n)$.

2. **Delayed Input:** $x_d[n] = x[n - n_0]$ and

$$y_d[n] = x_d[n] \cdot \cos(2\pi f_d n) = x[n - n_0] \cdot \cos(2\pi f_d n).$$

3. **Check:**

$$y[n - n_0] = x[n - n_0] \cdot \cos(2\pi f_d (n - n_0)) \neq y_d[n].$$

► **Conclusion:** not time-invariant.

Example: Modulator

- ▶ Alternatively, to show that the modulator is **not** time-invariant, we construct a counter-example.
- ▶ Let $x[n] = \{0, 1, 2, 3, \dots\}$, i.e., $x[n] = n$, for $n \geq 0$.
- ▶ Also, let $f_d = \frac{1}{2}$, so that

$$\cos(2\pi f_d n) = \begin{cases} 1 & \text{for } n \text{ even} \\ -1 & \text{for } n \text{ odd} \end{cases}$$

- ▶ Then, $y[n] = x[n] \cdot \cos(2\pi f_d n) = \{0, -1, 2, -3, \dots\}$.
- ▶ With $n_0 = 1$, $x_d[n] = x[n-1] = \{0, 0, 1, 2, 3, \dots\}$, we get $y_d[n] = \{0, 0, 1, -2, 3, \dots\}$.
- ▶ Clearly, $y_d[n] \neq y[n-1]$.
- ▶ **not time-invariant**

Example: FIR Filter

- ▶ **Reference:** $y[n] = \sum_{k=0}^{M-1} h[k] \cdot x[n - k]$.
- ▶ **Delayed Input:** $x_d[n] = x[n - n_0]$, and

$$y_d[n] = \sum_{k=0}^{M-1} h[k] \cdot x_d[n - k] = \sum_{k=0}^{M-1} h[k] \cdot x[n - n_0 - k].$$

- ▶ **Check:**

$$y[n - n_0] = \sum_{k=0}^{M-1} h[k] \cdot x[n - n_0 - k] = y_d[n]$$

- ▶ **time-invariant**

Exercise

- ▶ Let $u[n]$ be the unit-step sequence (i.e., $u[n] = 1$ for $n \geq 0$ and $u[n] = 0$, otherwise).
- ▶ The system is a 3-point averager:

$$y[n] = \frac{1}{3}(x[n] + x[n - 1] + x[n - 2]).$$

1. Find the output $y_1[n]$ when the input $x_1[n] = u[n]$.
2. Find the output $y_2[n]$ when the input $x_2[n] = u[n - 2]$.
3. Find the output $y[n]$ when the input $x[n] = u[n] - u[n - 2]$.
4. How are linearity and time-invariance evident in your results?