

ECE 630: Statistical Communication Theory

Dr. B.-P. Paris
Dept. Electrical and Comp. Engineering
George Mason University

Last updated: January 23, 2018



Part I

Introduction



Elements of a Digital Communications System

Source: produces a sequence of information symbols b .

Transmitter: maps symbol sequence to analog signal $s(t)$.

Channel: models corruption of transmitted signal $s(t)$.

Receiver: produces reconstructed sequence of information symbols \hat{b} from observed signal $R(t)$.




Figure: Block Diagram of a Generic Digital Communications System



The Source

- ▶ The source models the statistical properties of the digital information source.
- ▶ Three main parameters:
 - Source Alphabet:** list of the possible information symbols the source produces.
 - ▶ Example: $\mathcal{A} = \{0, 1\}$; symbols are called **bits**.
 - ▶ Alphabet for a source with M (typically, a power of 2) symbols: e.g., $\mathcal{A} = \{\pm 1, \pm 3, \dots, \pm(M-1)\}$.
 - ▶ Alphabet with positive and negative symbols is often more convenient.
 - ▶ Symbols may be complex valued; e.g., $\mathcal{A} = \{\pm 1, \pm j\}$.



A priori Probability: relative frequencies with which the source produces each of the symbols.

- ▶ Example: a binary source that produces (on average) equal numbers of 0 and 1 bits has $\pi_0 = \pi_1 = \frac{1}{2}$.
- ▶ Notation: π_n denotes the probability of observing the n -th symbol.
- ▶ Typically, a-priori probabilities are all equal, i.e., $\pi_n = \frac{1}{M}$.
- ▶ A source with M symbols is called an M -ary source.
 - ▶ binary ($M = 2$)
 - ▶ quaternary ($M = 4$)



Bit 1	Bit 2	Symbol
0	0	-3
0	1	-1
1	1	+1
1	0	+3

Table: Example: Representing two bits in one quaternary symbol.



Symbol Rate: The number of information symbols the source produces per second. Also called the **baud rate** R .

- ▶ Related: information rate R_b , indicates number of bits source produces per second.
- ▶ Relationship: $R_b = R \cdot \log_2(M)$.
- ▶ Also, $T = 1/R$ is the **symbol period**.
- ▶ Note: for most communication systems, the **bandwidth** W occupied by the transmitted signal is approximately equal to the baud rate R ,

$$W \approx R$$



Remarks

- ▶ This view of the source is simplified.
- ▶ We have omitted important functionality normally found in the source, including
 - ▶ error correction coding and interleaving, and
 - ▶ Usually, a block that maps bits to symbols is broken out separately.
- ▶ This simplified view is sufficient for our initial discussions.
- ▶ Missing functionality will be revisited when needed.



The Transmitter

- ▶ The transmitter translates the information symbols at its input into signals that are “appropriate” for the channel, e.g.,
 - ▶ meet bandwidth requirements due to regulatory or propagation considerations,
 - ▶ provide good receiver performance in the face of channel impairments:
 - ▶ noise,
 - ▶ distortion (i.e., undesired linear filtering),
 - ▶ interference.
- ▶ A digital communication system transmits only a discrete set of information symbols.
 - ▶ Correspondingly, only a discrete set of possible signals is employed by the transmitter.
 - ▶ The transmitted signal is an analog (continuous-time, continuous amplitude) signal.



Illustrative Example

- ▶ The sources produces symbols from the alphabet $\mathcal{A} = \{0, 1\}$.
- ▶ The transmitter uses the following rule to map symbols to signals:
 - ▶ If the n -th symbol is $b_n = 0$, then the transmitter sends the signal


$$s_0(t) = \begin{cases} A & \text{for } (n-1)T \leq t < nT \\ 0 & \text{else.} \end{cases}$$

- ▶ If the n -th symbol is $b_n = 1$, then the transmitter sends the signal

$$s_1(t) = \begin{cases} A & \text{for } (n-1)T \leq t < (n-\frac{1}{2})T \\ -A & \text{for } (n-\frac{1}{2})T \leq t < nT \\ 0 & \text{else.} \end{cases}$$



Symbol Sequence $b = \{1, 0, 1, 1, 0, 0, 1, 0, 1, 0\}$

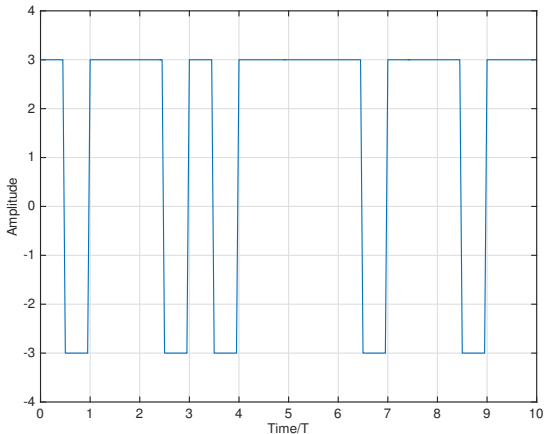



The Communications Channel

- ▶ The communications channel models the degradation the transmitted signal experiences on its way to the receiver.
- ▶ For wireless communications systems, we are concerned primarily with:
 - ▶ **Noise:** random signal added to received signal.
 - ▶ Mainly due to **thermal noise** from electronic components in the receiver.
 - ▶ Can also model interference from other emitters in the vicinity of the receiver.
 - ▶ Statistical model is used to describe noise.
 - ▶ **Distortion:** undesired filtering during propagation.
 - ▶ Mainly due to multi-path propagation.
 - ▶ Both deterministic and statistical models are appropriate depending on time-scale of interest.
 - ▶ Nature and dynamics of distortion is a key difference between wireless and wired systems.



Thermal Noise

- ▶ At temperatures above absolute zero, electrons move randomly in a conducting medium, including the electronic components in the front-end of a receiver.
- ▶ This leads to a **random** waveform.
 - ▶ The power of the random waveform equals $P_N = kT_0B$.
 - ▶ k : Boltzmann's constant (1.38×10^{-23} W s/K).
 - ▶ T_0 : temperature in degrees Kelvin (room temperature ≈ 290 K).
 - ▶ For bandwidth equal to 1 Hz, $P_N \approx 4 \times 10^{-21}$ W (-174 dBm).
- ▶ Noise power is small, but power of received signal decreases rapidly with distance from transmitter.
 - ▶ Noise provides a fundamental limit to the range and/or rate at which communication is possible.



Exercise: Path Loss and Signal-to-Noise Ratio

- ▶ A transmitter emits a signal with:
 - ▶ bandwidth $W = 1$ MHz
 - ▶ transmitted power $P_t = 1$ mW
 - ▶ carrier frequency $f_c = 1$ GHz
- ▶ During propagation from transmitter to receiver, the signal's power decreases; the received power follows **Friis law**:

$$P_r = P_t \cdot \left(\frac{c}{4\pi f_c d} \right)^2$$


where $c = 3 \times 10^8$ m/s is the speed of light and d is the distance between transmitter and receiver (in meters).

- ▶ Find:
 - ▶ the power of the received signal P_r for $d = 10$ km
 - ▶ the noise power P_N in the bandwidth W occupied by the transmitted signal
 - ▶ the ratio $\frac{P_r}{P_N}$; this is called the signal-to-noise ratio (SNR)




Multi-Path

- ▶ In a multi-path environment, the receiver sees the combination of multiple scaled and delayed versions of the transmitted signal.

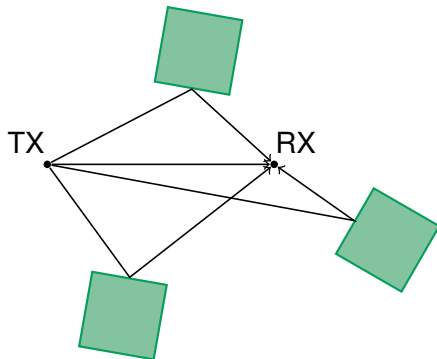



Distortion from Multi-Path

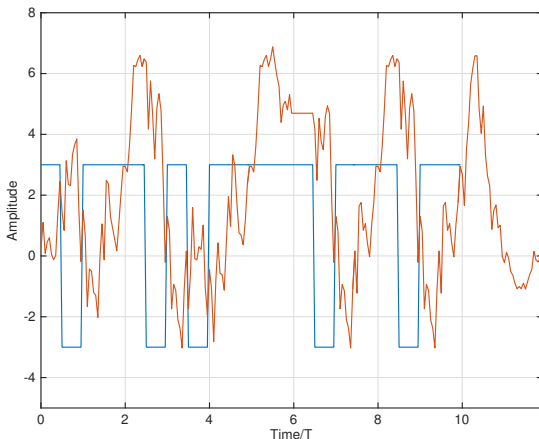

- ▶ Received signal “looks” very different from transmitted signal.
- ▶ Inter-symbol interference (ISI).
- ▶ Multi-path is a very serious problem for wireless systems.



The Receiver

- ▶ The receiver is designed to reconstruct the original information sequence b .
- ▶ Towards this objective, the receiver uses
 - ▶ the received signal $R(t)$,
 - ▶ knowledge about how the transmitter works,
 - ▶ Specifically, the receiver knows how symbols are mapped to signals.
 - ▶ the a-priori probability and rate of the source.
- ▶ The transmitted signal typically contains information that allows the receiver to gain information about the channel, including
 - ▶ training sequences to estimate the impulse response of the channel,
 - ▶ synchronization preambles to determine symbol locations and adjust amplifier gains.



The Receiver

- ▶ The receiver input is an analog signal and its output is a sequence of discrete information symbols.
 - ▶ Consequently, the receiver must perform analog-to-digital conversion (sampling).
- ▶ Correspondingly, the receiver can be divided into an analog **front-end** followed by digital processing.
 - ▶ Many receivers have (relatively) simple front-ends and sophisticated digital processing stages.
 - ▶ Digital processing is performed on standard digital hardware (from ASICs to general purpose processors).
 - ▶ Moore's law can be relied on to boost the performance of digital communications systems.



Measures of Performance

- ▶ The receiver is expected to perform its function optimally.
- ▶ **Question:** optimal in what sense?
 - ▶ Measure of performance must be statistical in nature.
 - ▶ observed signal is random, and
 - ▶ transmitted symbol sequence is random.
 - ▶ Metric must reflect the reliability with which information is reconstructed at the receiver.
- ▶ **Objective:** Design the receiver that minimizes the probability of a symbol error.
 - ▶ Also referred to as **symbol error rate**.
 - ▶ Closely related to bit error rate (BER).



Learning Objectives

1. Understand the mathematical foundations that lead to the design of optimal receivers in AWGN channels.
 - ▶ statistical hypothesis testing
 - ▶ signal spaces
2. Understand the principles of digital information transmission.
 - ▶ baseband and passband transmission
 - ▶ relationship between data rate and bandwidth
3. Apply receiver design principles to communication systems with additional channel impairments
 - ▶ random amplitude or phase
 - ▶ linear distortion (e.g., multi-path)



Course Outline

- ▶ Mathematical Prerequisites
 - ▶ Basics of Gaussian Random Variables and Random Processes
 - ▶ Signal space concepts
- ▶ Principles of Receiver Design
 - ▶ Optimal decision: statistical hypothesis testing
 - ▶ Receiver frontend: the matched filter
- ▶ Signal design and modulation
 - ▶ Baseband and passband
 - ▶ Linear modulation
 - ▶ Bandwidth considerations
- ▶ Advanced topics
 - ▶ Synchronization in time, frequency, phase
 - ▶ Introduction to equalization